

Nonlinear Response of HTSC Thin Film Microwave Resonators in an Applied DC Magnetic Field

Durga P. Choudhury^{a,b}, Balam A. Willemsen^{a,b}, John S. Derov^b and S. Sridhar^a

^aPhysics Department, Northeastern University, Boston, MA 02115

^bRome Laboratory, Hanscom AFB., Bedford, MA 01730

Abstract— The non-linear microwave surface impedance, $Z_s = R_s + iX_s$, of patterned YBCO thin films, was measured using a suspended line resonator in the presence of a perpendicular DC magnetic field, H_{DC} , of magnitude comparable to that of the microwave field, H_{rf} . Signature of the virgin state was found to be absent even for relatively low microwave power levels. The microwave loss was initially found to decrease for small applied H_{DC} before increasing again. Also, non-linearities inherent in the sample were found to be substantially suppressed at low powers at these applied fields. These two features together can lead to significant improvement in device performance.

I. INTRODUCTION

The microwave response of high- T_c superconductors (HTSC) is important both from the point of view of microwave applications of HTSC[1] and fundamental physics[2]. An understanding of the loss mechanisms, field and current profiles and nature of non-linearities can lead to improvement in fabricated devices that use them. While numerous experimental studies of non-linear microwave response of HTSC have been done [3], none of them to our knowledge have probed the non-linear response in the presence of DC magnetic fields, where the DC and microwave fields are of comparable magnitude. In this situation the effect of the microwave field cannot be considered as a small perturbative Lorentz force on the vortex lattice generated by the DC field, as is often done at high fields[4]. Such a situation can also act to test various models that have been proposed for the non-linear response.

II. EXPERIMENTAL TECHNIQUES

We used a patterned suspended resonant thin film of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ housed in a rectangular copper package to carry out this series of experiments. Similar methods have been used before[5], [6] with great success to investigate vortex dynamics and non-linearities in HTSC. The film, procured from Neocera Inc, was deposited on a 0.6 in $\times$

0.22 in $\times$ 0.010 in LaAlO_3 substrate by laser ablation, and was subsequently patterned in-house to a straight line of dimension 0.56 in $\times$ 0.004 in using methods described elsewhere [7]. In order to obtain the highest possible Q 's, the package was mechanically polished and thoroughly cleaned before each set of experiments. The resonator was made symmetric by placing a blank substrate of the same material and dimensions on top of the film before it was loaded into the package.

The assembly, complete with a controlling heater and temperature sensor, was inserted into the sample chamber of a Cryo Industries Variable Temperature cryostat. Two independent carbon glass sensors and temperature controllers were used to stabilize the temperature of the cavity to the degree required for these experiments. A LakeShore DR91C was used for gross control of the vaporizer temperature, which was set slightly below the desired sample temperature. The desired sample temperature was obtained and finely controlled with a LakeShore DR93CA. Temperature stability of the order of 1 mK were typical for the experiments presented here, where the data took up to two hours to obtain for each run.

DC magnetic fields up to 1000 Oe was applied parallel to the c -axis of the sample using a custom-built Walker Scientific copper solenoid and a LakeShore 622 superconducting power supply. Unlike typical Helmholtz coil configurations, the solenoid has no polecaps, thus ensuring that there is no remanent field, save for possibly the geomagnetic fields. It is worth pointing out that our experiment does not use any superconducting ground planes unlike parallel plate or microstrip resonators, thus avoiding complications due to demagnetization effects from such plates.

Microwaves were inductively coupled to and from the resonator by means of loops at the ends of stainless steel coaxial lines. The microwave transmission amplitude S_{21} was then measured using an HP 8510C Automatic Network Analyzer. The coupling strength was adjusted by varying the distance between the loops and the resonator as well as their relative orientation. Coupling could thus be reduced to the point that the loaded and unloaded Q 's are indistinguishable, simplifying the data extraction process. At the low input power levels that were used to carry out these experiments, the trace was very noisy. This coupled with the fact that we require extreme sensitivity to very small changes mean that we could not simply determine the Q from the maximum frequency and -3dB bandwidth as is often done. In order to reduce the noise

Manuscript received August 27, 1996.

D. P. Choudhury, 617-373-2948, fax 617-373-2943, dpc@neu.edu, <http://sagar.physics.neu.edu/>

Work at Northeastern University was supported by the AFOSR through Rome Labs, Hanscom AFB.

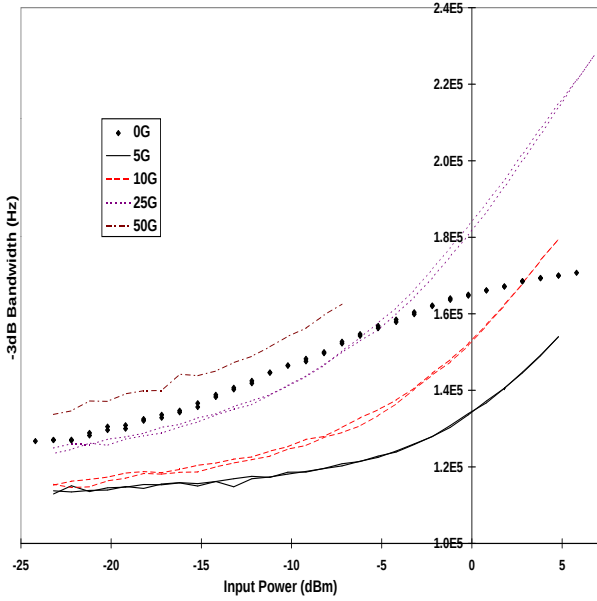


Fig. 3. Typical power dependence of resonance widths, taken at 10K

is not an artifact of some experimental inconsistency, we repeated the measurements on a film patterned out of a different albeit similar wafer. Although results obtained from this film were not quantitatively identical with those of the other, which would be expected because of the differences on growth, deposition and patterning of the two films, the two characteristic features described above was observed to a comparable extent in the second film. Also to rule out the effect of any stray remanent DC field, we carried out the microwave power ramp measurements with the DC field reversed and no such effects were found.

We have examined the present data in the framework of two proposed explanations for non-linear response in HTSC, viz. weak links and dynamics of a current-driven critical state. The weak link picture can be viewed in terms of a resistively shunted junction (RSJ) model, taking the effect of the DC field to be a DC current flowing on the surface in addition to the rf current. The equation of motion for the relative phase between the coupled grain then become $\dot{\phi} + \sin \phi = i_{dc} + i_{\omega} \cos \omega t$. The dynamic impedance can be calculated from $Z_{\omega} = \dot{\phi}_{\omega} / i_{\omega}$. While numerical calculations of this response yield very interesting effects as i_{dc} is varied, this approach does not seem to yield the results that are observed in this experiment.

The critical state model should also lead to ac + dc effects, so that the non-linearity should be modified by the DC magnetic field. However a calculation of this effect is not straight-forward, since it requires a prescription for the present case where the loss needs to be calculated when i_{rf} is varied over on rf cycle for finite H_{DC} . The available prescription in the literature [11] does not consider this case, but instead considers a different method of varying i_{rf} and H_{DC} . Hence, at the present, it is not pos-

sible to determine if the critical state model can explain these unusual results.

It is worth noting that the unusual decrease in R_s observed here can occur due to non-equilibrium effects and in fact have been seen in low T_c superconductors [12]. There it was shown that when the microwave frequency $\omega > \tau^{-1}$, where τ is the quasiparticle relaxation time, a non-equilibrium quasiparticle distribution can occur which leads to a decrease of R_s in the presence of an i_{dc} . Another related phenomenon which occurs is an enhancement of the superconducting gap. While this condition is met in pure metals at low temperatures, it is not clear if this happens in the high T_c materials.

However it is interesting to note that in $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ crystals, $R_s(T)$ is non-monotonic and there are regions of temperature where $(\partial R_s / \partial T) < 0$. This unusual, apparently non-thermodynamic result, may imply that $(\partial R_s / \partial i_{dc}) < 0$ need not be surprising.

IV. CONCLUSION

We have described a novel effect in which both the microwave losses and non-linear response decrease in the presence of small magnetic fields. Although a clear explanation of this effect is lacking, and it could arise from non-equilibrium quasiparticle effects, the present observation implies that losses can be reduced by as much as 30% and could have interesting implications for device performance.

REFERENCES

- [1] Zhi-Yuan Shen and Charles Wilker, "Raising the power-handling capacity of hts circuits", *Microwaves & RF*, pp. 129-138, April 1994.
- [2] T. C. L. Gerhard Sollner, Jay P. Sage, and Daniel E. Oates, "Microwave intermodulation products and excess critical current in $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ josephson junctions", *Appl. Phys. Lett.*, vol. 68, no. 7, pp. 1003-1005, February 1996.
- [3] Charles Wilker, Zhi-Yuan Shen, Philip Pang, William L. Holstein, and Dean W. Face, "Nonlinear effects in high temperature superconductors: 3rd order intercept from harmonic generation", *IEEE Trans. Appl. Supercond.*, vol. 5, no. 2, pp. 1665, June 1995.
- [4] Mark W. Coffey and John R. Clem, "Theory of rf magnetic permeability of isotropic type-II superconductors in a parallel field", *Phys. Rev. B*, vol. 45, no. 17, pp. 9872, May 1992.
- [5] Balam A. Willemsen, John S. Derov, José H. Silva, and S. Sridhar, "Vortex dynamics at microwave frequencies in patterned $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ thin films", *Appl. Phys. Lett.*, vol. 67, no. 4, pp. 551-553, July 1995.
- [6] Balam A. Willemsen, John S. Derov, José H. Silva, and S. Sridhar, "Nonlinear response of suspended high temperature superconducting thin film microwave resonators", *IEEE Trans. Appl. Supercond.*, vol. 5, no. 2, pp. 1753-1755, June 1995.
- [7] Balam A. Willemsen, *Vortex Dynamics at high Frequencies in Layered Superconductors*, PhD thesis, Northeastern University, Boston, MA 02115, October 1995.
- [8] P. P. Nguyen, D. E. Oates, G. Dresselhaus, and M. S. Dresselhaus, "Nonlinear surface impedance for $\text{YBa}_2\text{Cu}_3\text{O}_{7-x}$ thin films: Measurements and a coupled-grain model", *Phys. Rev. B*, vol. 48, no. 9, pp. 6400-6412, September 1993.
- [9] S. Sridhar, "Non-linear microwave impedance of superconductors and ac response of the critical state", *Appl. Phys. Lett.*, vol. 65, no. 8, pp. 1054-1056, August 1994.

- [10] J. S. Derov Balam A. Willemsen and S.Sridhar, “Critical state flux penetration and linear microwave vortex response in $Y_1Ba_2Cu_3O_{7-\delta}$ films”, Unpublished.
- [11] Ernst Helmut Brandt and Mikhail Indenbom, “Type-II-superconductor strip with current in a perpendicular magnetic field”, *Phys. Rev. B*, vol. 48, pp. 12893–12906, 1993.
- [12] Srinivas Sridhar, *Microwave Dynamics of Quasiparticles and Critical Fields in Superconducting Films*, PhD thesis, California Institute of Technology, 1983.